


GX C-300™

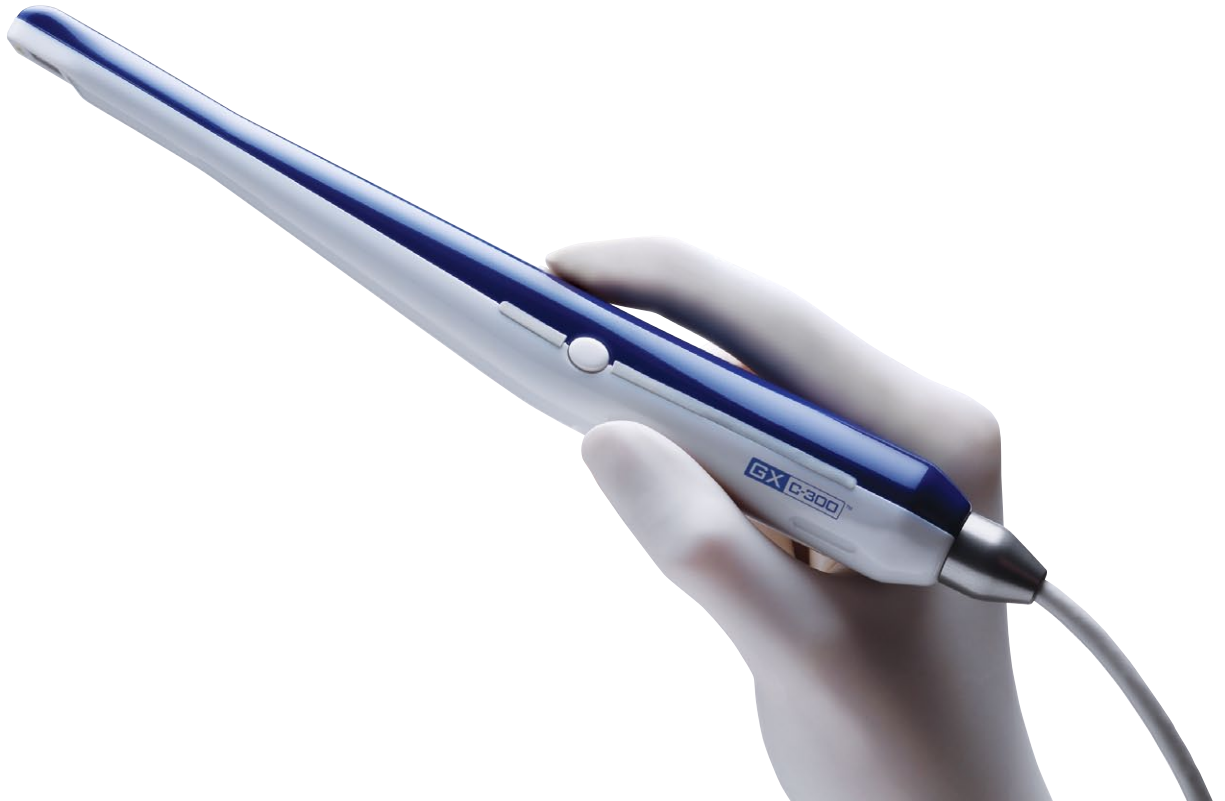

The Simple Tool For Patient Education.

- ⇒ Maximum Portability
- ⇒ Advanced Technology
- ⇒ Improved Performance

Cone Beam 3D Imaging Systems

Panoramic X-ray Systems

Intraoral X-ray Systems

Digital Intraoral Sensors

Digital X-ray Phosphor Plates

⇒ Intraoral Cameras

Imaging Software

GENDEX®
Imaging Excellence Since 1893

Introducing the GXC-300

GenDEX continues their long tradition of providing dental professionals with quality imaging equipment with our brand new, GXC-300 lightweight intraoral camera. Combining the latest video technologies, the GXC-300 is an exceptional tool for patient education, higher case acceptance, and improved patient communication.

☞ Maximum Portability

- High-speed direct USB connection with no docking station required
- Features a lightweight handpiece and reduced cabling
- Disconnects effortlessly for quick transfer to another operator

☞ Advanced Technology

- Virtually eliminates image distortion by utilizing true optics
- Sliding adjustable focus button for maximum performance
- Side capture button allows for Quad-Image capture
- State-of-the-art 4 LED lighting system

☞ Improved Performance

- Camera activation controlled automatically by holster and always-active software interface
- Holster can be mounted almost anywhere so it's always within reach

GXC-300 Technical Specifications

| | |
|-------------------|---|
| Image Types | Intraoral and Extraoral Views / Freeze Quad-Image / Streaming Video |
| Angle of View | 60° |
| Direction of View | 90° |
| Focal Range | 1 mm to infinity |
| Focus | Adjustable for Intraoral / Extraoral |
| Output Resolution | 640 x 480 pixels |
| Lighting | 4 High luminance LEDs |
| USB Cable Length | 10 feet (3 meters) |
| Dimensions | 1.1" x 1" x 9" (28.5 x 25.5 x 230 mm) |
| Weight | 6.3 oz (180 g) |

GXC-300 Minimum System Requirements

| | |
|------------------|---|
| Operating System | Microsoft® Windows® XP SP2 or higher |
| Processor | Pentium® 4, 2 GHz or higher |
| Memory | 1 GB |
| Video RAM | 32 MB |
| Display Settings | 1024 x 768 at 24 bit true color or higher |
| API | Microsoft® DirectX 9.0b or higher |
| Disk Drive | CD-ROM (for installation) |
| Ports | USB 2.0 |



Featuring a high-speed direct USB 2.0 connection to eliminate the need for any type of docking station



Easily adjustable focus for intraoral and extraoral use



Convenient side capture button for image acquisition

